


YSC(K)

YSC, YSK, 표준형 스피드 컨트롤러

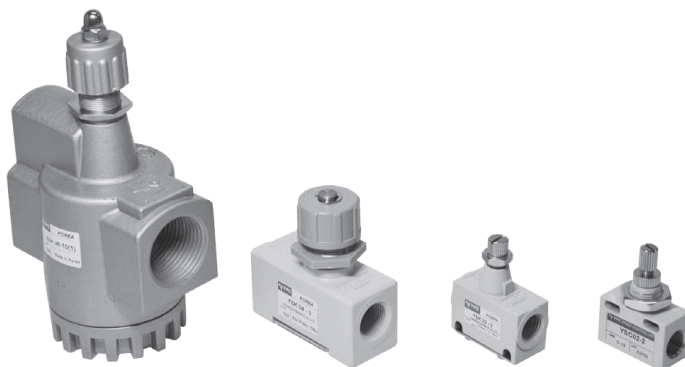

◆ 주문형식 표기방법(YSC)

YSC 02 - 2

① ② ③

① 시리즈

YSC시리즈

② 규격

02 : 폭 18mm 시리즈

③ 접속구경

1 : 접속구경 1/8

2 : 접속구경 1/4

◆ YSC 사양

적용모델	YSC02-1	YSC02-2
보증내압력	1.5 Mpa	
최고사용압력	1 Mpa	
최저사용압력	0.05 Mpa	
사용유체온도	5 ~ 60° (41~ 140°F)	
접속구경	1/8	1/4

◆ 주문형식 표기방법(YSK)

YSK 02-1

① ②

① 시리즈

YSK시리즈

② 규격

02-1 : 접속구경 1/8

02-2 : 접속구경 1/4

04-3 : 접속구경 3/8

04-4 : 접속구경 1/2

05-6 : 접속구경 3/4



06-10 : 접속구경 1

◆ YSK 사양



적용모델	YSK02	YSK04	YSK05	YSK06
보증내압력	1.5 Mpa			
최고사용압력	1 Mpa			
최저사용압력	0.05 Mpa			
사용유체온도	5 ~ 60° (41~ 140°F)			
접속구경	1/8, 1/4	3/8, 1/2	3/4	1

◆ 외형치수도



► YSC02-1

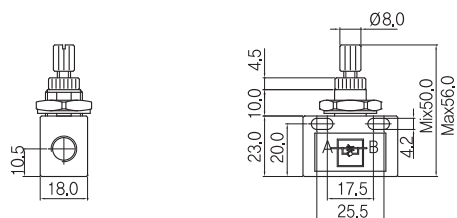



► YSC02-2

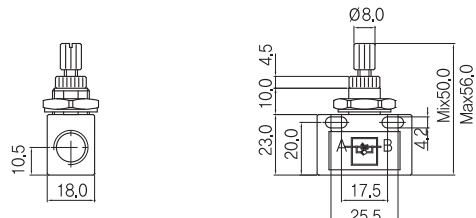

▶ YSK02-1

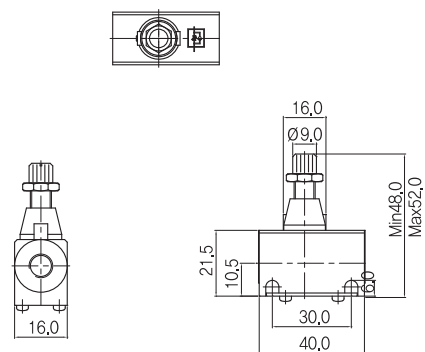


▶ YSK02-2

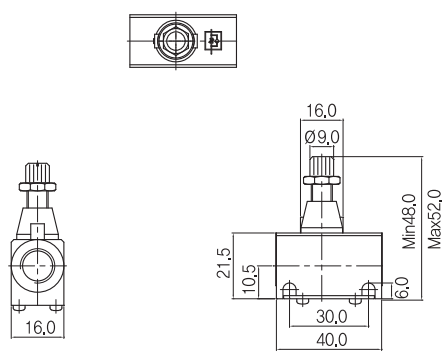


◆ 외형치수도


▶ YSK04-3

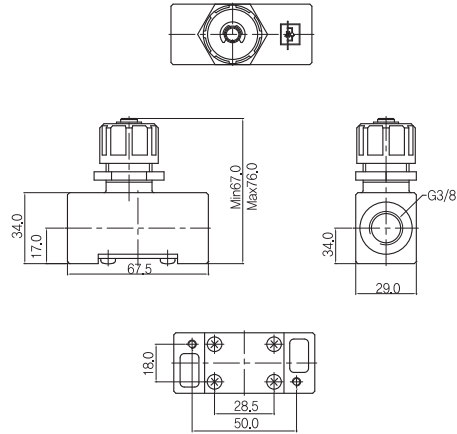

▶ YSK04-4

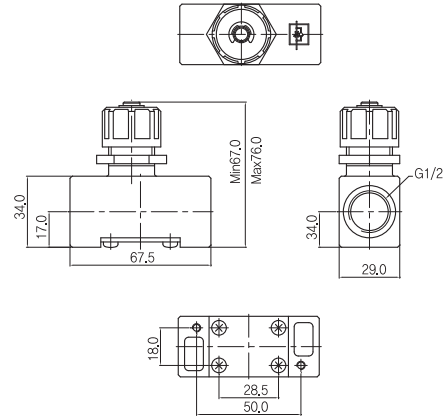

▶ YSK05-6

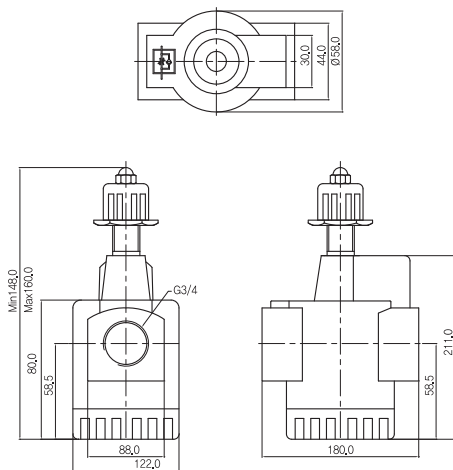

▶ YSK06-10

